

Hard meets soft, creating a perfect match

Hard and soft comes together in perfect unity to create a whole new world of inspired floor designs. Our LVT selections of natural and textured wood-grains and creative stones have been thoughtfully designed -- they perfectly integrate, complementing the same natural inspirations seen in our extensive carpet tiles range. No matter how you arrange them, these are designed to mix and flow seamlessly together. In fact, they fit like a glove without the need for transition strips.

Interface LVT is constructed from a combination of highly durable, recyclable layers. Scuffs and scratches from everyday wear are minimized by Ceramor™, a ceramic bead coating that protects the surface layer of the tile. A high performance backing layer, Sound Choice™ acts in the same way as our carpet tiles, reducing noise impact levels and delivering outstanding acoustic properties. And all these are backed by the same 15-year product warranty too.

Get the best of both worlds by pairing LVT with modular carpet tiles, and say hello to harmonious, gorgeous style

















Integrated System.


Say goodbye to transition strips and doubling up. Our LVT floorings are made to work as a system with our modular carpet tiles. The compatible size and height of our products allows you to integrate modular carpet as an inset rug or an adjacent field – no transition strips required. You'll avoid doubling up on materials and save money.

Flexible Installation.

Create faster, cleaner and more flexible installations. Use one installation system for both LVT and Carpet tile. Multiple options are available from innovative glue free installation using Tactiles to Intertac, pressure sensitive adhesive or even permanent adhesive depending on the installation requirements.

Circular System.

Keep flooring out of the landfill. Our LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry® program.

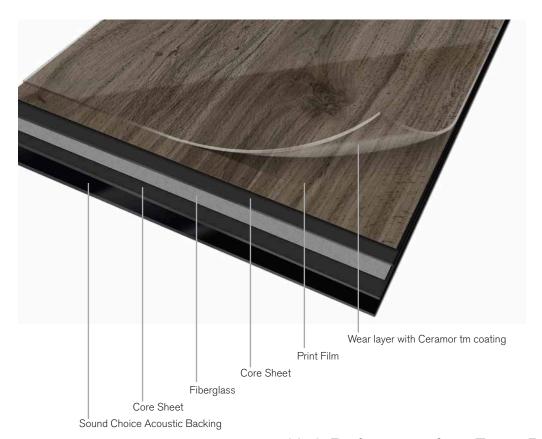

High Performance from Top to Bottom.

From our Ceramor™ Top Coat to our Sound Choice™ backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

Abrasion Resistance. Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

A Strong Core. Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a glue-free installation and the ability to move and update with ease.

Quiet Comfort. (or just "Quiet") With an IIC rating of 57 our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise enhances workplace productivity and creates more usable, comfortable spaces.



Specifications

Level Set Collection | Woodgrains

Style Name / Number Textured Woodgrains - A004

Natural Woodgrains - A002

Product Construction High Performance Luxury Vinyl Plank Class / ASTM F1700 Class III Printed Vinyl Plank and Tile

Wear Layer Thickness 22 mil / 0.55 mm

Total Thickness 4.5 mm

Backing Class Commercial Grade
Acoustic Layer SOUND CHOICE™

Finish CERAMOR™ UV Stabilized Ceramic Bead Coating

Nominal Dimensions 25cm x 100cm

Performance

Critical Heat Flux GB/T 11785 under GB 8624, ISO 9239-1, ASTM E648 Smoke Rate GB/T 11785 under GB 8624, ISO 9239-1, ASTM E662

Slip Resistance GB/T 4100, ASTM D2047

Sound Accoustic ISO 354 & ISO 10140-3, ASTM E492

(absorption & Transmission)

 Size, Tolerance
 GB/T 4085, ISO 24342, ASTM F2055

 Dimensional Stability
 GB/T 4085, ISO 23999, ASTM F2199

 Residual Indentation
 GB/T 4085, ISO 24343-1, ASTM F1914

 Resistance to Light
 GB/T 4085, ISO 105-B02, ASTM F1515

Resistance to Heat ASTM F1514

 Resistance to Chemicals
 GB/T 4085, EN-ISO 26987, ASTM F925

 VOC Test
 GB 18586, ISO 10580, ASTM D5116

Flexibility GB/T 4085, ISO 24344 Method A, ASTM F137

Antibacterial Activity ASTM 2180
Static Load ASTM F970
Abrasion Resistance GB/T 4085

Environmental

Ingredients & Life Cycle Impacts
Environmental Product Declaration

Sustainability Assessment NSF/ANSI 332, Meets Certification Guidelines

LEED v4 Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR

End of Life Fully Recyclable LVT to Carpet Tile Backing Recycling

Technical Information

Installation See Interface LVT Installation Guidelines online

Maintenance See Interface LVT Maintenance Guidelines online

Reclamation Recyclable through ReEntry®
Warranty 15 Year Limited Commercial Warranty

Installation Methods Ashlar, Herringbone





Level Set Collection | Woodgrains Colourline



A004-07 Textured Woodgrains - White Wash



A002-08 Natural Woodgrains - Sand Dune



A004-06 Textured Woodgrains - Antique Light Oak



A002-07 Natural Woodgrains - Washed Wheat



A002-11 Natural Woodgrains - Washed Maple



A002-12 Natural Woodgrains - Cedar



A002-10 Natural Woodgrains - Teak



A002-04 Natural Woodgrains - Beech



A002-06 Natural Woodgrains - Winter Grey



A004-05 Textured Woodgrains - Grey Dune



A004-04 Textured Woodgrains - Distressed Black Walnut



A002-05 Natural Woodgrains - Storm

As part of Interface's Mission Zero promise to eliminate any negative impact on the environment by 2020, we always consider the environment impact of every creative, manufacturing and building decision. This sample book is printed on recycled paper and with soy based ink. Twenty four virgin trees were saved from our use of 1725kg of recycled paper in the production of 5000 sample books. Energy intensity also decreased and greenhouse gases were reduced. The other reductions came from waste water and solid waste. Through our sample reclamation program, we help keep sample materials out of landfill by re-using them until it is time to recycle these sample materials.

www.interface.com

South East Asia

Interface Asia tel: 65-6478 1510 www.interface.com

South Korea

tel. 82-2-555 1734 www.interface.com

Japan

Interface Japan tel: 81-3-5733 5211 www.interface.com

India

Interface India tel: 91 80 30589350 www.interface.com

Beijing Studio

Interface China tel: 86-10-6590 7810 www.interface.com.cn

Hongkong Studio

Interface China tel: 852-2802 0838 www.interface.com.cn

Shanghai Studio

Interface China tel: 86-21-6340 3868 www.interface.com.cn

Australia

Interface Australia local toll free: 1800 008 101 www.interface.com

12/2016 SF0085T0



Mission Zero:

our promise to eliminate any negative impact our company may have on the environment by the year 2020.