

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company



Roller Blinds



Printed

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company



Suede Printed



SP 351



SP 352



SP 353



SP 354

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.29 mm (± 0.05)
Weight	: 290 g/m ² ($\pm 5\%$)
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr.



Proton Blackout



PB 361



PB 363



PB 365



PB 362

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



Proton Blackout



PB 364



Holder for Twin Blinds

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.45 mm (± 0.05)
Weight	: 325 g/m ² ($\pm 5\%$)
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.60 Mtr.



Atlantic Blackout



AB 376

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



Atlantic Blackout



AB 377

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.46 mm (± 0.05)
Weight	: 440 g/m ² ($\pm 5\%$)
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr.

Roller Blinds





Vapor Blackout



VB 387

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified

ISO 9001:2000 Certified Co

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified De

ISO 9001:2000 Certified Company



Vapor Blackout



VB 386

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.40mm (±0.05)
Weight	: 380 g/m ² (±5%)
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr.



Ronald Blackout



RB 372

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company



Ronald Blackout



RB 371

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.35 mm (± 0.05)
Weight	: 305 g/m ² ($\pm 5\%$)
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr.



Texan Blackout



TB 381

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company



Texan Blackout



TB 382

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.38 mm (\pm 0.05)
Weight	: 335 g/m ² (\pm 5%)
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr.

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



Splendid Blackout



SB 504

Roller Blinds





Splendid Blackout



SB 509

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.30 mm (± 0.05) SB - 504 to 507
	: 0.45 mm (± 0.05) SB - 509
Weight	: 270 g/m ² ($\pm 5\%$) SB - 504 to 507
	: 400 g/m ² ($\pm 5\%$) SB - 509
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr. SB - 504 to 507
	: 2.30 Mtr. SB - 509



Splendid Blackout



SB 507

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

Splendid Blackout



SB 505

Roller Blinds



SB 506



Splendid Blackout



SB 501



SB 502

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



SB 503



Splendid Blackout

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.35 mm (± 0.05) SB - 501 to 502
	: 0.44 mm (± 0.05) SB - 503 & 510
Weight	: 275 g/m ² ($\pm 5\%$) SB - 501 to 502
	: 385 g/m ² ($\pm 5\%$) SB - 503 & 510
Visibility	: Zero
Light Transparency	: Zero
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr. SB - 502, 503 & 510
	: 2.30 Mtr. SB - 501



SB 510



Flourish Translucent



FT 391

Roller Blinds



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



Flourish Translucent



FT 392

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.40 mm (\pm 0.05)
Weight	: 235 g/m ² (\pm 5%)
Visibility	: Yes
Light Transparency	: 20 to 30 %
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 1.90 Mtr.



CT 409



Castle Translucent

Roller Blinds



CT 408

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

Castle Translucent



CT 411



CT 410

Marvel
ISO 9001:2000 Certified Company



Castle Translucent

Roller Blinds



CT 405



CT 406

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company



Castle Translucent



CT 412

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.25 mm (± 0.05)
Weight	: 175 g/m ² ($\pm 5\%$)
Visibility	: Zero
Light Transparency	: 10 to 20 %
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr. CT - 406, 410 & 412
	: 2.30 Mtr. CT - 405, 408, 409 & 411



CT 401

Mavel
ISO 9001:2000 Certified Company



Castle Translucent



CT 402

Roller Blinds





CT 413



ISO 9001:2000 Certified Company



Castle Translucent

Roller Blinds



CT 416



CT 403

Marvel[®]
ISO 9001:2000 Certified Company



Castle Translucent



CT 414

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



Castle Translucent



CT 415

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.25 mm (± 0.05)
Weight	: 175 g/m ² ($\pm 5\%$)
Visibility	: Zero
Light Transparency	: 10 to 20 %
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Very High
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr. CT - 401, 413, 414, 415 & 416 2.30 Mtr. CT - 402 & 403

Roller Blinds





Acute Screen

Roller Blinds



AS 456



AS 457

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company

ISO 9001:2000 Certified Company



Acute Screen

Roller Blinds



AS 453



AS 454




Acute Screen



AS 455

Technical Detail

Composition	: 100 % Polyester
Thickness	: 0.25 mm (± 0.05)
Weight	: 90 g/m ² ($\pm 5\%$)
Visibility	: Yes
Openness Factor	: Average 25 %
Coating	: Acrylic Coating resistant to Cracking & Fraying
Hanging Properties	: Excellent
Tearing Strength	: Normal
Cleaning	: Conditionally cleanable with a damp cloth
Width	: 2.00 Mtr. AS - 457
	: 2.30 Mtr. AS - 453 to 456

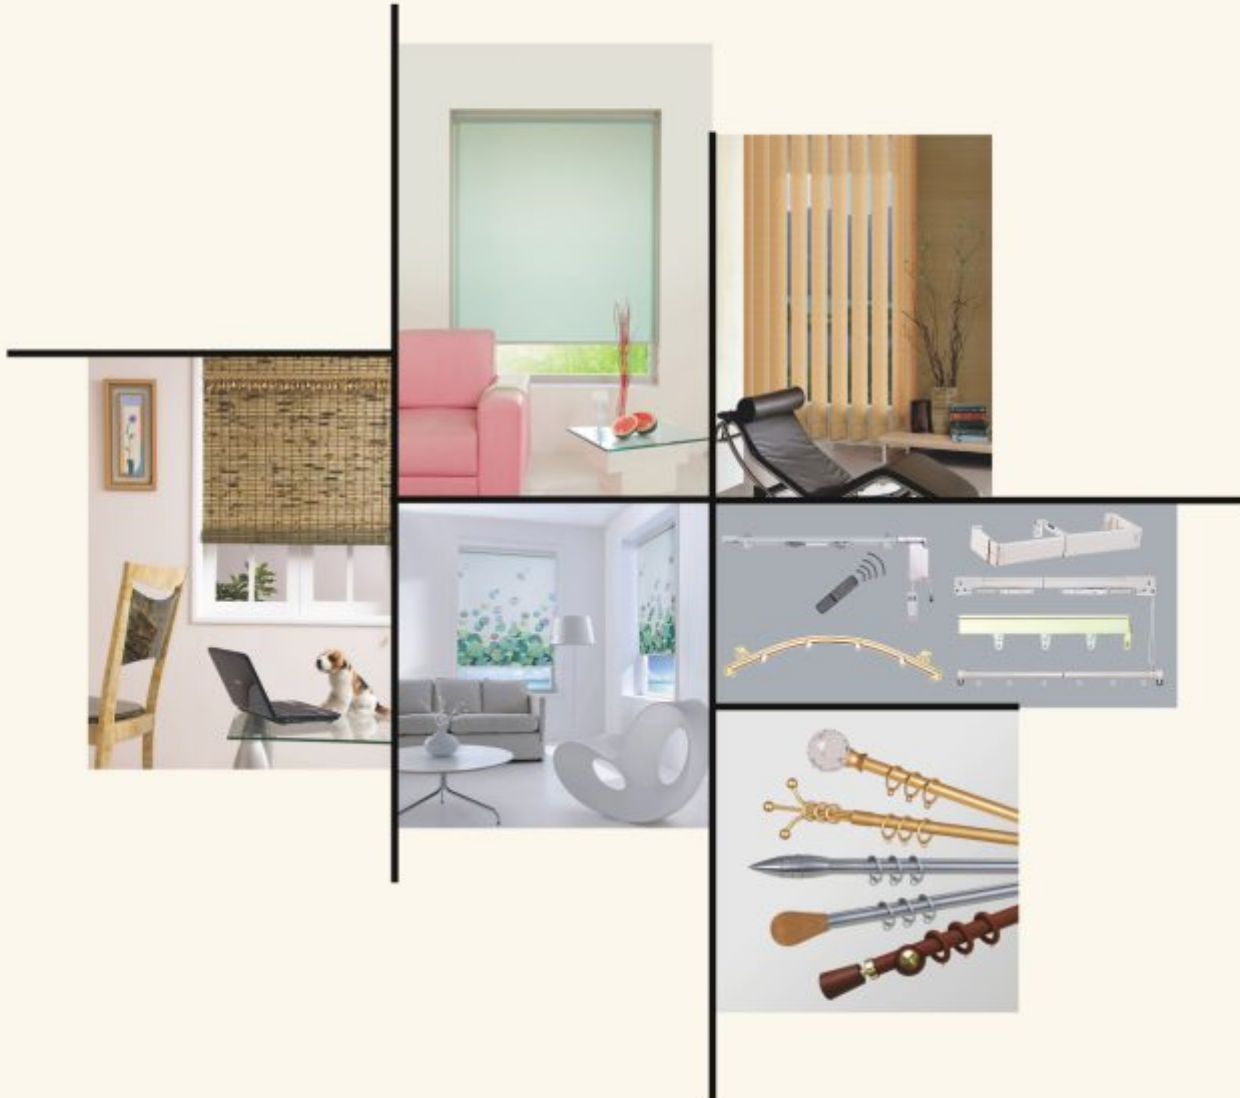

ISO 9001:2000 Certified Company

Sales Office : 604, Palm Spring Complex, Link Road, Malad (West) Mumbai - 400 064. India. Tel : +91-22-28800602, 28808282. Fax : +91-22-28810601.
 Factory : Plot No.: 211, G.I.D.C. Phase - II, Dared, Jamnagar - 361 004. Gujarat - India. Tel : +91-288-2730601, 2730602. Fax : +91-288-2730603.

e-mail : sales@marvellifestyle.com ■ web : www.marvellifestyle.com

Roller Blinds | **Vertical Blinds** | **Bamboo Blinds** | **Curtain Rods & Tracks**

www.marvellifestyle.com