

OPTRA RH 95

Tiles & Planks




Optra is a glass fibre ceiling solution for high acoustic spaces with glass fibre (Optra FG) and rockwool (Optra RW) as core material.

The ideal product for modern office environments, its excellent sound absorption properties (high NRC of 0.9 up to 1.0) helps in creating noise free open plan offices, cafeterias, or any other places where too much noise can be disruptive. This improves comfort and increases productivity by reducing ambient noise.

Its fine textured white surface makes it an ideal solution in terms of **aesthetics**. To provide an excellent **mechanical strength**, all products have a fibre glass fleece at the back. All board and tile edges are painted to avoid dispersion of fibres, ensuring longer life. In addition, Optra ceilings are available in a large variety of size, colour, pattern and edge detail combinations.

▼ Optra Microlook



Black




Steel Grey



Nile Blue



Amber



Optra

mineral tiles & planks optra rh 95

Recycled Content **66% GW & 74% RW**

LEED Credits

Energy	Waste Mgmt	Recycled Content	Low-emitting Materials	Renewable Materials	Daylight & Views
✓	✓	✓	✓	✓	✓



15 YEAR warranty

With Armstrong Steel Angle

OPTRA RH 95	BOARD	TEGULAR	MICROLOOK	SL2/K2C2
	 Prelude 24 mm	 Prelude 24 mm	 Suprafine 15 mm/ Silhouette	 XL 24 mm
	<p>Optra FG Classic, Pebble and Pearl</p> <p>600 x 600 x 15 mm ✓</p> <p>600 x 1200 x 15 mm ✓</p> <p>600 x 600 x 20 mm ✓</p> <p>600 x 1200 x 20 mm ✓</p> <p>600 x 1800 x 20 mm ✓</p> <p>600 x 2400 x 20 mm ✓</p> <p>600 x 1200 x 25 mm ✓</p> <p>600 x 1800 x 25 mm ✓</p> <p>600 x 2400 x 25 mm ✓</p> <p>600 x 2700 x 25 mm ✓</p> <p>1200 x 1200 x 25 mm ✓</p> <p>Optra FG Classic Black</p> <p>600 x 600 x 20 mm ✓</p> <p>600 x 1200 x 20 mm ✓</p> <p>600 x 1800 x 20 mm ✓</p> <p>600 x 2400 x 20 mm ✓</p> <p>600 x 1200 x 25 mm ✓</p> <p>600 x 1800 x 25 mm ✓</p> <p>600 x 2400 x 25 mm ✓</p> <p>600 x 2700 x 25 mm ✓</p> <p>1200 x 1200 x 25 mm ✓</p>			




Optra FG Colour: White, Black (standard)
Steel Grey, Nile Blue, Amber (on request)



EN 20354 & EN 11654

	Hz							
α_w	NRC	125	250	500	1000	2000	4000	
• OPTRA FG WHITE CLASSIC 15 mm	0.90	0.90	0.64	1.00	0.96	0.80	0.92	1.00 α_p
• OPTRA FG WHITE PEARL 15 mm	1.0	1.0	0.88	1.12	1.16	0.88	1.08	1.00 α_p

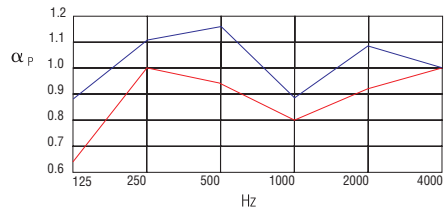

≅ 85%



95% RH



UK Class 0/Class 1 (BS 476 Pt - 6, & 7)
China CH Class A



15 mm: 1.8 kgs/m²
20 mm: 2.3 kgs/m²
25 mm: 2.8 kgs/m²



Armstrong World Industries (India) Pvt. Ltd.

Boomerang, A-Wing, Unit No. 304, 3rd. Floor, Chandivali Farm Road (near Chandivali Studio) Andheri (east), Mumbai - 400 072
Tel: 022-3048 0800, Fax: 022-3046 0439 / 2491 3604 | e-mail : helpdeskindia@armstrong.com

Branches:

Ahmedabad : +91-93761 33127	Bengaluru : +91-80-2657 6367	Chandigarh : +91-172-2633 680
Chennai : +91-44-4217 5303	Gurgaon : +91-124-2385 671	Hyderabad : +91-40-3200 9868
Indore : +91-73899 42297	Kolkata : +91-33-2401 4755	Lucknow : +91-522-220 1143
Pune : +91-93733 23149		

Representatives:

Bhubaneswar : +91-99370 42387	Cochin : +91-96330 09209	Coimbatore : +91-87544 57957
Guwahati : +91-96780 69393	Jaipur : +91-87692 17000	Nagpur : +91-93259 95527
Nashik : +91-93259 95556	Ludhiana : +91-93169 19120	Surat : +91-93256 76005
Vizag : +91-93467 83496		

www.armstrong.co.in